

Frequency enhanced inductive sensors **LR12X** series

**Features**

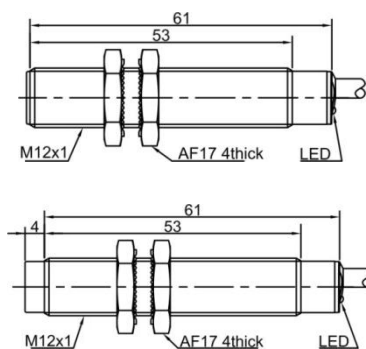
- ◆ High switching frequency, fast response;
- ◆ ASIC technology, more reliable;
- ◆ Perfect choice for high speed detecting application;


**Part number**

NPN NO	LR12XCF02DNOG	LR12XCN04DNOG	PNP NO	LR12XCF02DPOG	LR12XCN04DPOG
NPN NC	LR12XCF02DNCG	LR12XCN04DNCG	PNP NC	LR12XCF02DPCG	LR12XCN04DPCG

**Technical specifications**

Mounting	Flush	Non-flush	Current consumption	≤10mA	
Rated distance [Sn]	2mm	4mm	Circuit protection	Short-circuit, overload and reverse polarity	
Assured distance [Sa]	0...1.6mm	0...3.2mm	Output indicator	Yellow LED	
Dimensions	M12*61mm	M12*65mm	Ambient temperature	-25°C...70°C	
Output	NO/NC(depends on part number)		Ambient humidity	35...95%RH	
Supply voltage	10...30 VDC		Switching frequency [F]	4000 Hz	3000 Hz
Standard target	Fe 12*12*1t	Fe 12*12*1t	Voltage withstand	1000V/AC 50/60Hz 60s	
Switch-point drifts [%/Sr]	≤±10%		Insulation resistance	≥50MΩ(500VDC)	
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)	
Repeat accuracy [R]	≤3%		Degree of protection	IP67	
Load current	≤200mA		Housing material	Nickel-copper alloy	
Residual voltage	≤2.5V		Connection type	2m PVC cable	

**Dimensions**

**Wiring diagram**
